

549,552

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10 SEP 2005



(43) International Publication Date
30 September 2004 (30.09.2004)


PCT

(10) International Publication Number
WO 2004/083093 A2

- (51) International Patent Classification⁷: **B66B 9/08**
- (21) International Application Number:
PCT/GB2004/000877
- (22) International Filing Date: 3 March 2004 (03.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0306367.4 20 March 2003 (20.03.2003) GB
- (71) Applicant (for all designated States except US): **STAN-
NAH STAIRLIFTS LIMITED** [GB/GB]; Watt Close,
East Portway, Andover, Hampshire SP10 3SD (GB).
- (72) Inventor; and
- (73) Inventor/Applicant (for US only): **WOODHAMS, Max,
Daniel** [GB/GB]; 19 Balmoral Road, Andover, Hampshire
SP10 3HY (GB).
- (74) Agents: **STRACHAN, Victoria, Jane et al.**; Urquhart-
Dykes & Lord LLP, Alexandra House, Alexandra Road,
Swansea SA1 5ED (GB).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: IMPROVEMENTS IN OR RELATING TO STAIRLIFTS

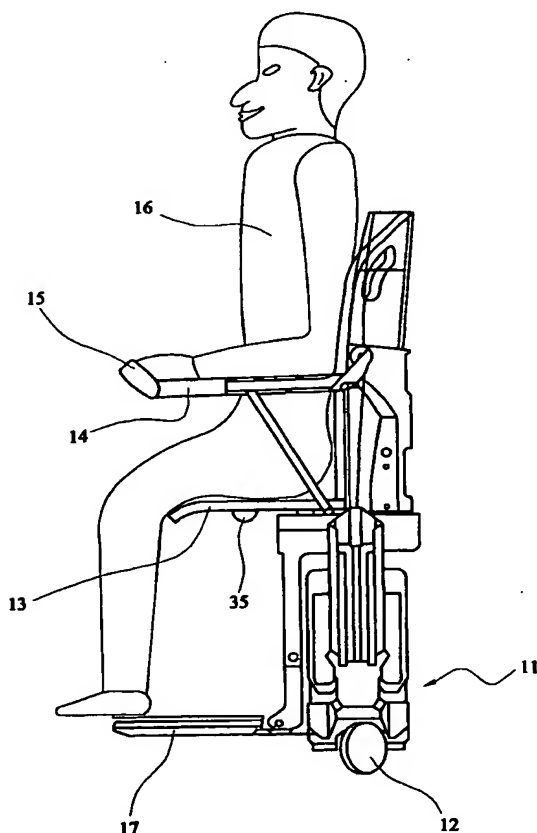

(57) Abstract: The invention provides a hand-operated interface through which a stairlift user can control the operation of the stairlift. The interface is configured for comfortable reception in the palm of the hand and its position may be adjusted along the axis of the armrest of the stairlift chair to best suit the arm length of the user. The interface may also incorporate an isolation switch which provides both a visual and a tactile indication of whether or not the stairlift controls are activated for use.

WO 2004/083093 A2



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

IMPROVEMENTS IN OR RELATING TO STAIRLIFTS

Field of the Invention

This invention relates to stairlifts and, in particular, to a control interface through which a stairlift user may operate a stairlift.

5 Background to the Invention

Stairlifts are typically used by persons having limited mobility. The limitation in mobility often includes limited manual dexterity. This latter point is relevant when it comes to operating the stairlift, since the stairlift controls are almost universally hand operated.

One common form of operating control currently used on stairlifts comprises a joystick. Typically the joystick is positioned at the outer end of an armrest forming part of a stair lift chair. The joystick projects vertically upwards from the armrest and terminates in a knob or ball. The user must vertically rotate the wrist so as to locate the knob or ball in the palm of the hand. Once so located, horizontal rotation of the wrist displaces the joystick so as to control the operation of the stair lift carriage.

The positioning of the joystick is generally convenient once the user is seated in the stair lift chair, although users with long forearms may find themselves having to displace their elbow rearward to an uncomfortable extent in order that the joystick may be accommodated comfortably in the palm of the hand. There is nothing which can be done to alleviate this problem since the joystick assembly is fixed into the armrest.

Often a stairlift user finds it necessary to steady themselves, when mounting the stairlift chair by, placing a hand on the armrest. The positioning of a joystick at the end of the armrest often interferes with this activity. Not only may the stairlift be unintentionally operated should the mounting user
5 inadvertently bump the joystick but further, a joystick applies point loading to a user's palm and this loading would be accentuated to an intolerable level if a substantial part of the user's body weight was applied to the joystick when mounting the chair. Indeed, the joystick assembly might not survive a user's weight being applied thereto.

10 One common alternative to the joystick control described above, is the use of push-buttons on the armrest. As with the joystick control the positions of the push-buttons are fixed on the armrest and this may cause some discomfort to those having long forearms. Further, as with joystick controls, push-button controls are susceptible to inadvertent operation and it is generally recognized
15 that push-buttons can be fiddly to operate, particularly by persons having impaired manual dexterity.

At least one attempt has been made to address some of the problems encountered with the controls described above. European Patent Application 0 915 952 describes a control interface for a stairlift in the form of a disc
20 mounted on the outer end of a chair armrest. The disc has a convex upper surface which is comfortable for reception in the palm of a user's hand, however the lower edge of the disc forms a sharp edge which is so designed as to enable a user to hook the thumb under the control. For persons having limited manual dexterity, this action may prove difficult if not impossible, and
25 it would certainly not be possible to wrap the hand around the control or to operate the control comfortably using the side of the hand. Further, the fixed position of the control on the armrest means that those users with longer

forearms will still be susceptible to the types of discomfort mentioned above and, as with the forms on control mentioned above, this type of control may be operated inadvertently.

A further characteristic of existing stairlifts is that they almost invariably include a key to isolate the stairlift when not in use. In many cases this key is mounted on the underside of the armrest adjacent to the joystick and it can be very difficult for persons having limited hand dexterity to operate the key. Another problem with a key control is that it can be difficult to establish, at a glance, if the key is in the on or off position; and a user may complain that the stairlift is defective when, in fact, the only problem is that the key is in the off position.

It is an object of the present invention to provide controls, including an operating interface, for a stairlift which go at least some way in addressing at least some of the aforementioned problems; or which will at least provide a novel and useful choice.

Summary of the Invention

Accordingly, in a first aspect, the invention provides a stairlift chair including a pair of armrests, each of the said armrests having an upper surface; and a control interface mounted on one of said armrests, said chair being characterized in that said control interface has a palm contacting surface which forms a substantial extension of the upper surface of the armrest to which said interface is attached.

Preferably said control interface is pivotable about a substantially vertical axis.

Preferably said control interface is constructed and arranged to avoid point loading on a user's palm when in use.

Preferably said control interface has a substantially planar upper surface and side surfaces aligned substantially perpendicularly to said upper surface.

- 5 Preferably said one of said armrests has a longitudinal axis, the position of said control interface being adjustable along said longitudinal axis.

Preferably said control interface is angled upwardly out of the plane of said upper surface.

Preferably said control interface embodies a power isolation switch.

- 10 In a second aspect the invention provides a stairlift chair including two spaced armrests, each armrest having an rear end, a forward end, and a longitudinal axis; and a control interface positioned on or adjacent the forward end of one of said armrests, said chair being characterized in that the position of said control interface is adjustable along said longitudinal axis.

- 15 Preferably each of said armrests comprises a fixed rear part and a forward part which is slidable with respect to said rear part, said control interface being incorporated within said forward part.

- 20 In a third aspect the invention provides a manually engageable control interface for mounting on an armrest of a stair lift chair, said interface being characterized in that it is upwardly angled with respect to said armrest, includes a palm contacting surface constructed and arranged to avoid point loading on a user's palm, when in use and includes side surfaces configured to permit smooth contact by the side of a user's hand.

Preferably said palm contacting surface is constructed and arranged to underlie at least 50% of the area of a user's palm.

5 In a fourth aspect, the invention provides a manually engageable control interface for a stairlift, said interface including a body member engageable by a user's hand when said stairlift is in use, said interface being characterized in that said body member is formed in two parts which are displaceable with respect to one another such that, in a first configuration of said two parts, said control interface is inactive.

10 Preferably, when said body parts are in said first configuration, the resulting form of said body differs visually and/or provides a different tactile sensation to the user's hand than when said body parts are in an operative configuration.

In a fifth aspect the invention provides a stairlift including the chair and/or control interface as set forth above.

In a sixth aspect the invention provides stairlift assembly including:

15 a rail;

a carriage mounted for movement along said rail;

drive means within said carriage for driving said carriage along said rail;

a chair mounted on said carriage ;

20 and at least one hand operated control whereby an occupant of said chair can control the operation of said drive means,

said stairlift assembly being characterized in that a sensor is provided to sense when a user is occupying said chair, said sensor being further operable to isolate and energise said hand operated control.

In an seventh aspect the invention provides a stairlift assembly including:

5 a rail;

a carriage mounted for movement along said rail;

drive means within said carriage for driving said carriage along said rail;

a chair mounted on said carriage ;

10 at least one hand operated control whereby an occupant of said chair can control the operation of said drive means;

an isolation switch to isolate the power supply to said stairlift

said stairlift assembly being characterized in that said isolation switch is incorporated into said hand operated control.

15 Many variations in the way the present invention can be performed will present themselves to those skilled in the art. The description which follows is intended as an illustration only of one means of performing the invention and the lack of description of variants or equivalents should not be regarded as limiting. Wherever possible, a description of a specific element should be deemed to include any and all equivalents thereof whether in existence now or
20 in the future. The scope of the invention should be limited by the appended claims alone.

Brief Description of the Drawings

One preferred form of the invention will now be described with reference to the accompanying drawings in which:

- 5 **Figure 1:** shows a side elevation of a stairlift assembly having a chair embodying the invention:
- Figure 2:** shows a top view of a stairlift chair fitted with a control interface according to the invention.
- Figure 3:** shows an enlarged side view of the control interface, and part of one armrest of the chair shown in Figure 1:
- 10 **Figure 4:** shows an isometric view, from above, of that which is shown in Figure 3:
- Figures 5:** show isometric views of the control interface in two alternative
 and 6 configurations:
- Figure 7:** shows a sectional view through the control interface when in
15 the configuration shown in Figure 5;
- Figure 8:** shows a control interface according to the invention underlying the palm of a user's hand;

Figure 9: shows a side view of a user's hand in contact with a control interface as described herein; and

Figure 10: shows a view similar to that of Figure 9 but with the user's hand positioned differently.

5 *Detailed Description of the Working Embodiment*

According to the invention a control interface for a stairlift is provided whereby an occupant of the stairlift, having limited manual dexterity, can safely and confidently control the movement of the stairlift carriage along the rail. The same interface may simplify the task of isolating power to the stairlift and give a clear visual and/or tactile signal to the user when the stairlift is isolated. As described herein, this invention also includes an aspect intended to avoid inadvertent operation of the stairlift, particularly when the user is mounting or dismounting the stairlift chair.

Referring firstly to Figures 1 and 2, a stairlift assembly is shown comprising a carriage 11 mounted on a rail 12 for movement there along. Mounted, in turn, on the carriage, is a chair 13. In common with conventional stairlift chairs, the chair 13 has a pair of spaced armrests 14a and 14b. Mounted on or adjacent the outer end of one of the armrests 14 (in this case armrest 14a) is a control interface 15. Whilst the control interface 15 could be a unit discrete from the armrest 14a, in the particular embodiment of the invention described herein, the interface 15 is preferably incorporated in a forward part of the armrest 14a. Thus, the control pod is conveniently positioned for contact and displacement by a user 16 seated in the chair 13.

The chair 13 further includes a footrest 17. In the known manner, the footrest 16 and the armrests 14 may be folded into vertically upright positions so that,

when the stairlift is not in use, maximum clearance may be provided for foot traffic on the staircase.

Each of the armrests 14a and 14b is preferably formed in two parts, a fixed rear part 21 and a forward part 22 which is slidable or telescopic with respect to the rear part 21. Locking means (not shown) of any suitable form is provided to lock the forward part 22 with respect to the rear part 21. This arrangement allows the control interface 15 to be positioned to best suit the arm length of a particular user.

Once the length of armrest 14a has been set so as to correctly locate the control interface 15, the length of armrest 14b can be set so as to match the length of armrest 14a, thus leaving the user positioned evenly and comfortably.

The position of the interface 15 may be set other than purely for the ergonomic reasons described above. In installations on very narrow staircases, it may be necessary to draw the interface back or set the interface at an angle θ as shown in Figure 2, to provide sufficient clearance between the stairlift installation and the staircase wall. Angle θ may, in extreme cases, be up to 45° if a particularly narrow stairway is encountered.

As can best be seen in Figure 3 to 5, the control interface 15 comprises an elongate body which tapers towards its free end. This body is mounted to the front part 22 of armrest 14a so as to be pivotable about substantially vertical axis 24. The axis 24 is, itself, preferably positioned on the longitudinal centerline 25 of the armrest 14a.

The interface has a substantially planar or slightly curved upper surface 27, the surface 27 being shaped for comfortable receipt in the palm 29 of a user's

hand 30, as can be seen more clearly in Figures 8 and 9, and also being shaped to avoid any point loading on the palm 29. As can best be seen in Figures 3, 9 and 10, the upper surface 27 of the interface 15 is a substantially natural extension of the upper surface 23 of the armrest 14a, albeit at an angle to the plane of the surface 23. For a reason which will become more apparent from the description which follows below, the general alignment of interface 15 is angled upwardly at an angle of about 20°.

Projecting downwardly from the upper surface 27 are a pair of smooth, substantially vertical side surfaces 32.

An internal spring (not shown) is preferably provided to return the control interface to a neutral position such as that shown in Figure 4. Thus, in the conventional manner, pivoting the interface in one direction about pivot axis 24 causes the stair lift carriage to move in one direction. Pivoting the interface in the opposite direction causes the carriage to move in the opposite direction.

Referring particularly to Figure 9, a user may operate the interface 15 by placing the palm 29 of the hand 30 in contact with the upper surface 27 of the interface, curling the hand over the interface, and rotating the wrist to effect pivotal movement of the interface about axis 24.

Some users, particularly those having limited manual dexterity, may have difficulty manipulating the interface 15 in the manner just described. These latter users may find it easier to nudge the interface about axis 24 by using the side of the hand against one of the side surfaces 32 of the interface, as shown in Figure 10. This is particularly helpful to users who suffer from arthritis in the hands.

As can be seen in Figure 8, the interface 15 underlies a substantial portion of the palm of a user's hand, in the form shown at least 50%.

As discussed in the background above, a problem with existing stairlift controls is that they can be operated inadvertently. This is most likely to occur when the user is mounting, or dismounting from, the stairlift chair. With this in mind, according to another aspect of the invention, a sensor is provided to sense when the user is seated in the chair. This sensor is provided in circuit with the operating controls so that the control interface 15 is only functional when the user is seated in the chair. This form of isolation could be provided in combination with any form of stairlift control, and not just with the particular form of control interface described herein.

10 In the form shown herein, the sensor comprises load sensor 35 provided in the chair base. A signal from the load sensor 35 is fed into the main operating control unit (not shown) which isolates the control interface 15 when the load sensor indicates that the chair is not occupied.

Turning now to Figures 5 to 7, it will be noted that the control interface 15 is preferably formed in two parts 37 and 38, the two parts being displaceable, and preferably rotatable, with respect to one another. When in the operating position, as shown in Figure 6, the two parts provide one smooth contiguous body. However, when the stairlift is to be disarmed, the forward body part 38 is rotated with respect to the fixed body part 37. As can be seen in Figure 7, embodied within the body 15 is a key assembly, the head of the key 40 being retained in the forward body part 38. Thus the forward body part 38 can be withdrawn to prevent unauthorised use of the stairlift.

A further benefit of the disabling or lock arrangement shown in Figures 5 to 7 is that the bulk of the forward body part 38 allows easy manipulation of the key lock by persons having limited hand dexterity. It will also be appreciated that, when the key is in the 'off' position as indicated in Figure 6, the non-alignment of body part 38 gives a clear visual and/or tactile message to a user

that the stairlift is immobilised. Thus a user can tell, at once, if the stairlift control is not configured for use. This applies whether the chair is extended or folded since the isolation control, being carried on the end of the interface 15, is fully visible at all times. This is in contrast to existing arrangements in which the control is located under the armrest and is thus, at best, only partially visible when the armrest is in the down or operative position.

In use, a stairlift user 16 mounts the stairlift chair 13 in the conventional manner though no harm will be done, or discomfort experienced, if the user supports himself on the interface 15 whilst moving into the chair. Once seated in the chair 13, the user's presence will be sensed by sensor 35 and the control interface 15 enabled. If the interface 15 still does not operate, the user will readily be able to determine if the key switch is in the off position by visually noting the mis-alignment of interface body parts 37 and 38, and/or through the tactile sensation imparted to the hand by the mis-aligned parts.

With the control 15 energised, the user may power the carriage along the rail by applying the weight of the hand to the upper surface 18 of the interface, and pivoting the same about axis 24. The direction in which the interface is pivoted determines whether the carriage moves up or down the rail.

If the user finds it uncomfortable to bear down on the interface with the weight of his hand, then the user may nudge the interface about axis 24 using the side of the hand against the side of the interface. Obviously which side of the hand is applied against which side of the interface will determine the direction of movement of the carriage.

It will thus be appreciated that present invention provides an extremely useful form of control interface for a stairlift assembly which eases the entry on to, and exit from, the stairlift chair whilst providing easy operation of the stairlift

by persons having limited hand dexterity. Further, the embodiment described herein provides a novel and inventive solution for avoiding inadvertent operation of the stairlift.

Claims

1. A stairlift chair including a pair of armrests, each of the said armrests having an upper surface; and a control interface mounted on one of said armrests, said chair being characterized in that said control
5 interface has a palm contacting surface which forms a substantial extension of the upper surface of the armrest to which said interface is attached.
2. A stairlift chair as claimed in claim 1 wherein said control interface is pivotable about a substantially vertical axis.
- 10 3. A stairlift chair as claimed in claim 1 or claim 2 wherein said control interface is constructed and arranged to avoid point loading on a user's palm when in use.
4. A stairlift chair as claimed in any one of claims 1 to 3 wherein said control interface has a substantially planar upper surface and side
15 surfaces aligned substantially perpendicularly to said upper surface.
5. A stairlift chair as claimed in any one of the preceding claims wherein said one of said armrests has a longitudinal axis, the position of said control interface being adjustable along said longitudinal axis.
6. A stairlift chair as claimed in any one of the preceding claims wherein
20 said control interface is angled upwardly out of the plane of said upper surface.
7. A stairlift chair as claimed in any one of the preceding claims wherein said control interface embodies a power isolation switch.

- 5 8. A stairlift chair including two spaced armrests, each armrest having an rear end, a forward end, and a longitudinal axis; and a control interface positioned on or adjacent the forward end of one of said armrests, said chair being characterized in that the position of said control interface is adjustable along said longitudinal axis.
9. A stairlift chair as claimed in claim 8 wherein each of said armrests comprises a fixed rear part and a forward part which is slidable with respect to said rear part, said control interface being incorporated within said forward part.
- 10 10. A manually engageable control interface for mounting on an armrest of a stairlift chair, said interface being characterized in that it is upwardly angled with respect to said armrest, includes a palm contacting surface constructed and arranged to avoid point loading on a user's palm, when in use and includes side surfaces configured to permit smooth
15 contact by the side of a user's hand.
11. An interface as claimed in claim 10 wherein said palm contacting surface is constructed and arranged to underlie at least 50% of the area of a user's palm.
- 20 12. A manually engageable control interface for a stairlift, said interface including a body member engageable by a user's hand when said stairlift is in use, said interface being characterized in that said body member is formed in two parts which are displaceable with respect to one another such that, in a first configuration of said two parts, said control interface is inactive.

13. An interface as claimed in claim 12 wherein, when said body parts are in said first configuration, the resulting form of said body differs visually and/or provides a different tactile sensation to the user's hand than when said body parts are in an operative configuration.
- 5 14. A stairlift including the chair and/or control interface as claimed in any one of the preceding claims.
15. A stairlift assembly including:
- a rail;
- a carriage mounted for movement along said rail;
- 10 drive means within said carriage for driving said carriage along said rail;
- a chair mounted on said carriage ;
- and at least one hand operated control whereby an occupant of said chair can control the operation of said drive means,
- 15 said stairlift assembly being characterized in that a sensor is provided to sense when a user is occupying said chair, said sensor being further operable to isolate and energise said hand operated control.
16. A stairlift assembly including:
- a rail;
- 20 a carriage mounted for movement along said rail;

drive means within said carriage for driving said carriage along said rail;

a chair mounted on said carriage ;

5 at least one hand operated control whereby an occupant of said chair can control the operation of said drive means;

an isolation switch to isolate the power supply to said stair lift,

said stairlift assembly being characterized in that said isolation switch is incorporated into said hand operated control.

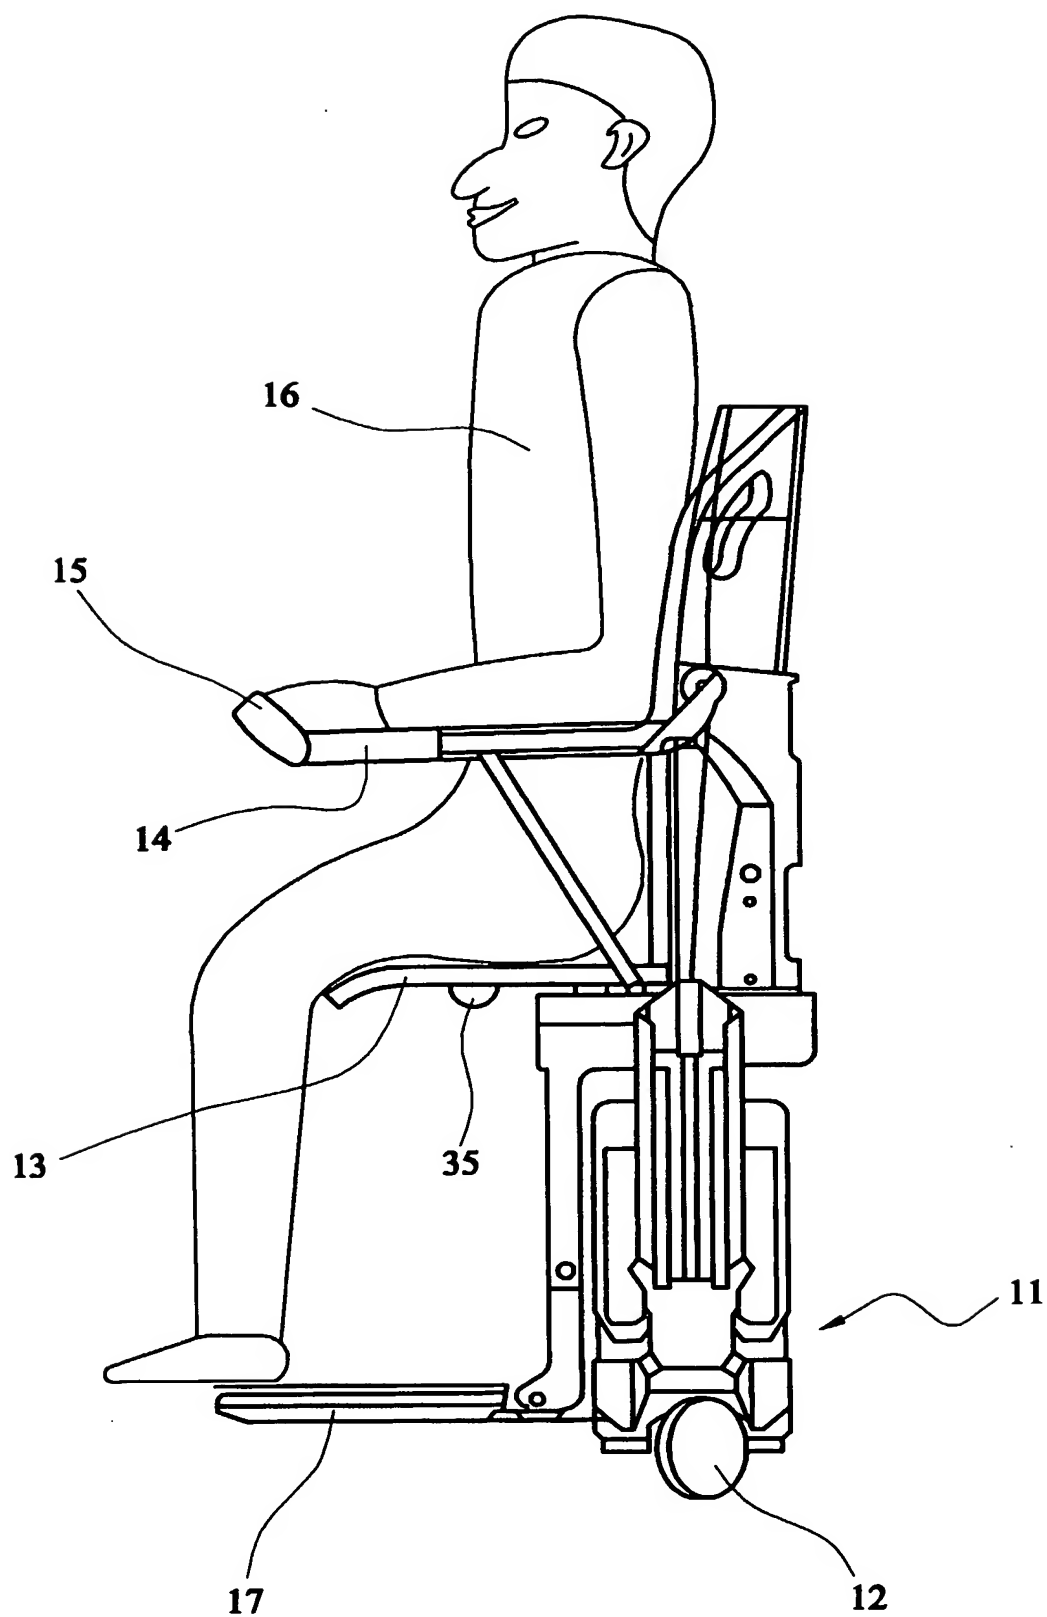


FIG. 1

SUBSTITUTE SHEET (RULE 26)

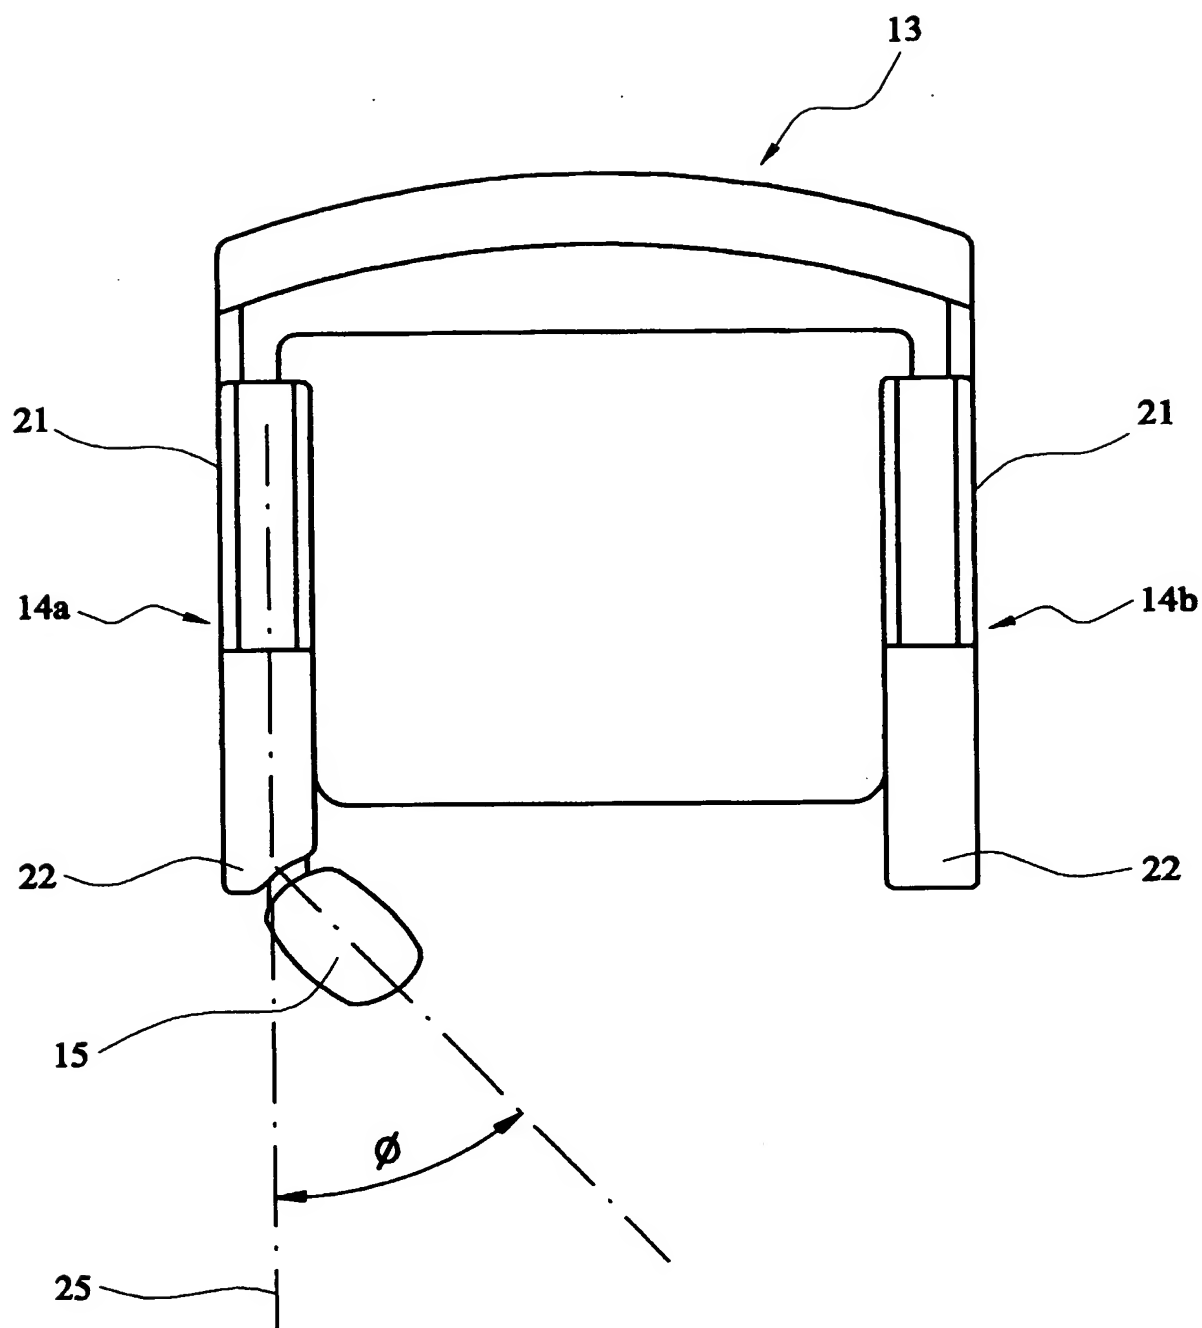


FIG. 2

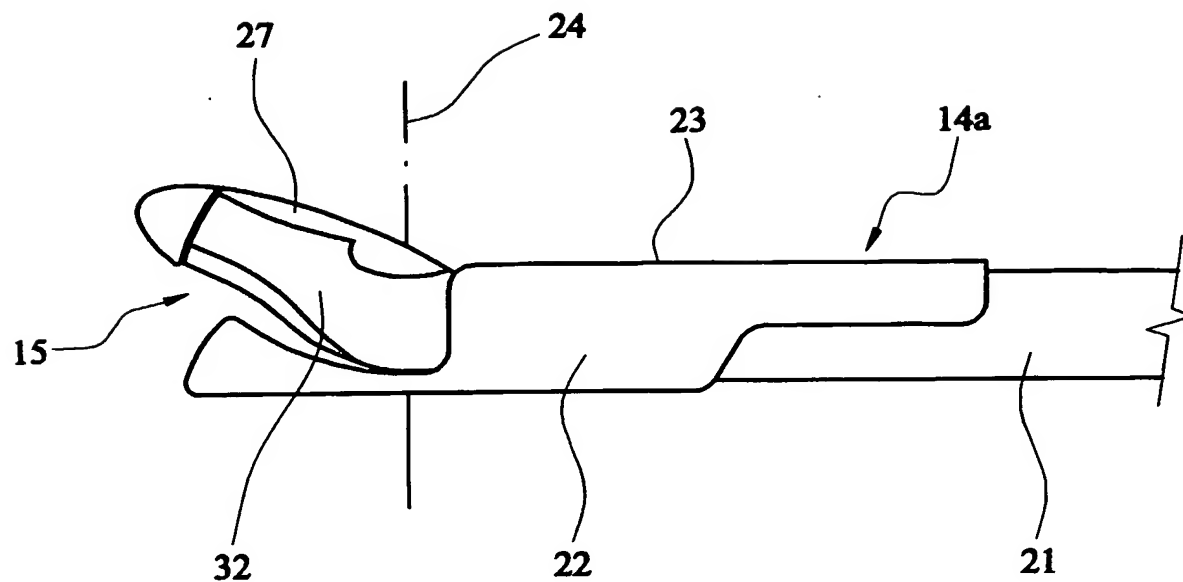


FIG. 3

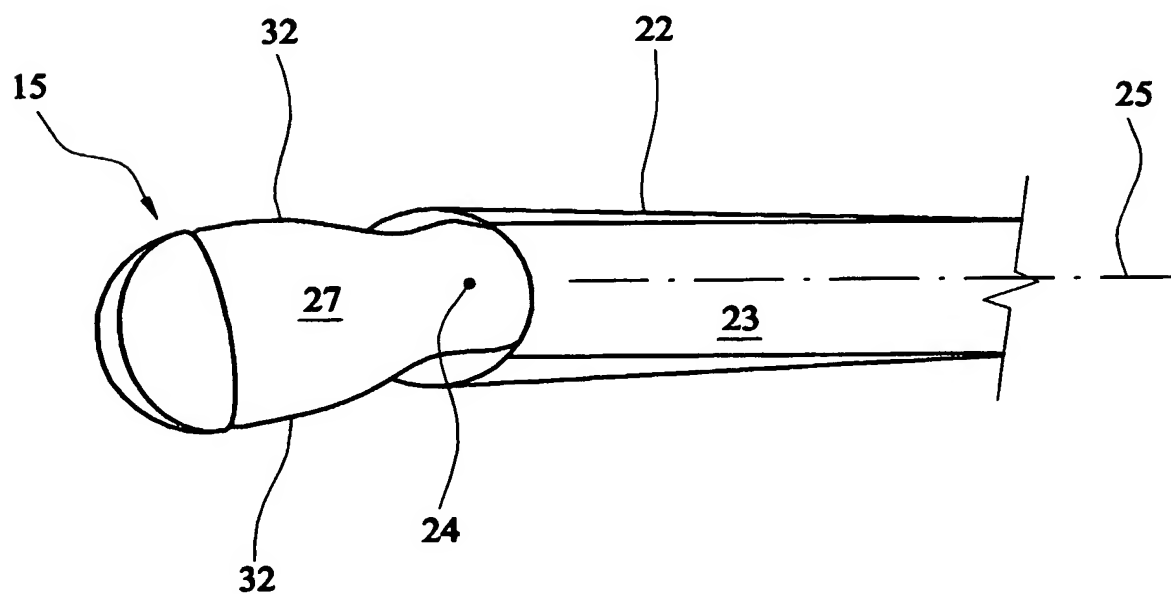


FIG. 4

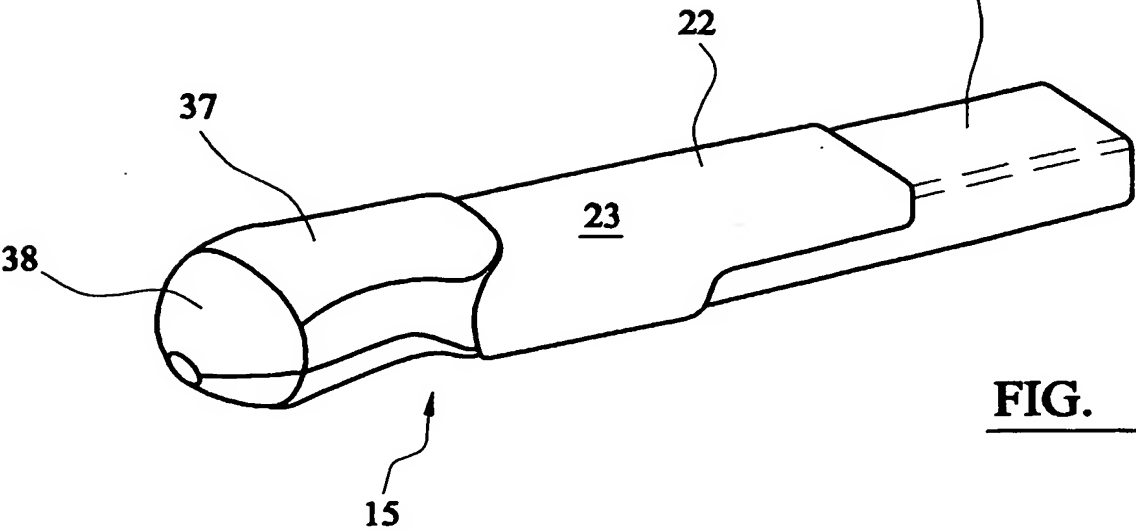


FIG. 5

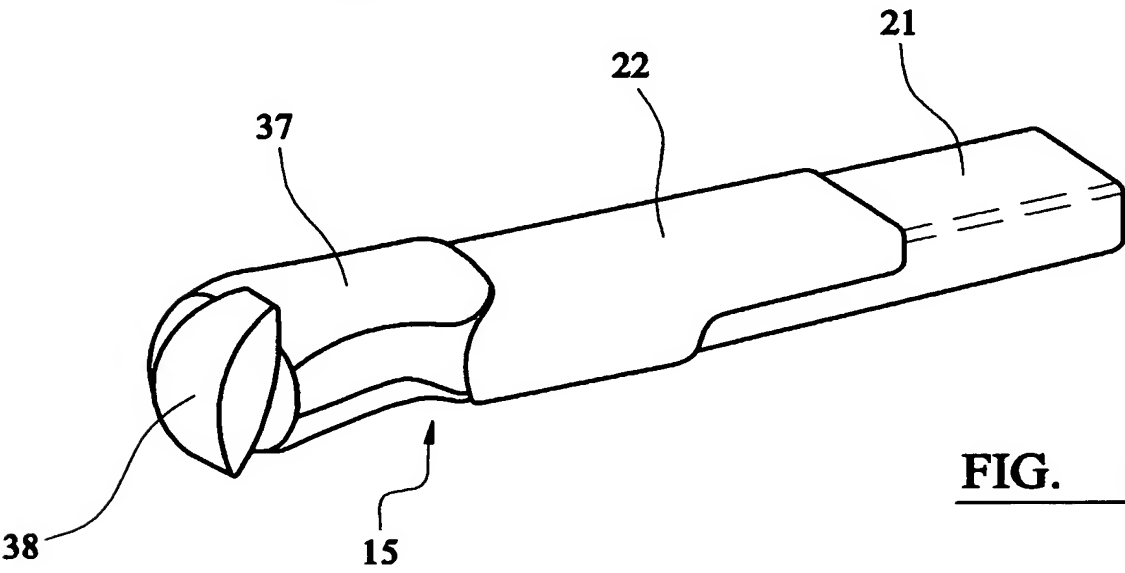


FIG. 6




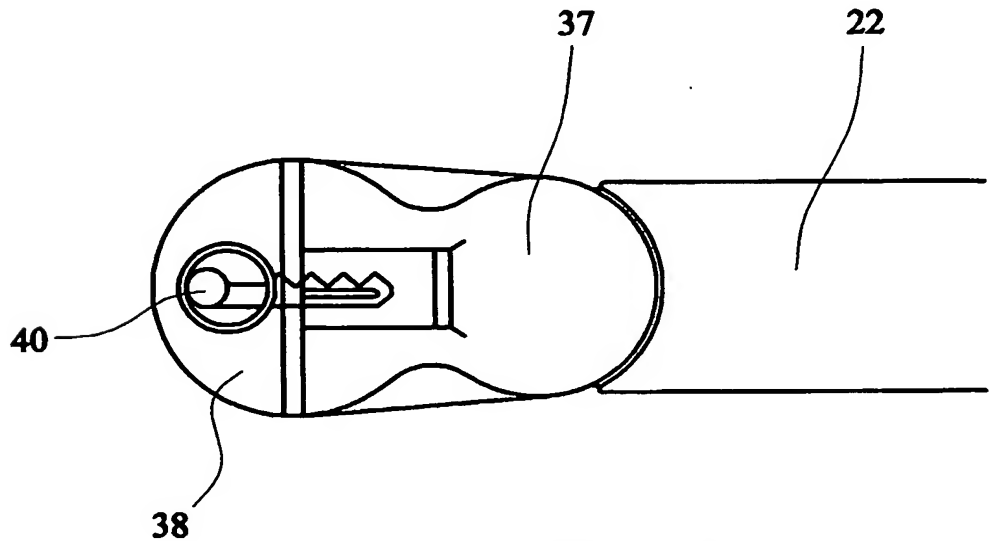


FIG. 7

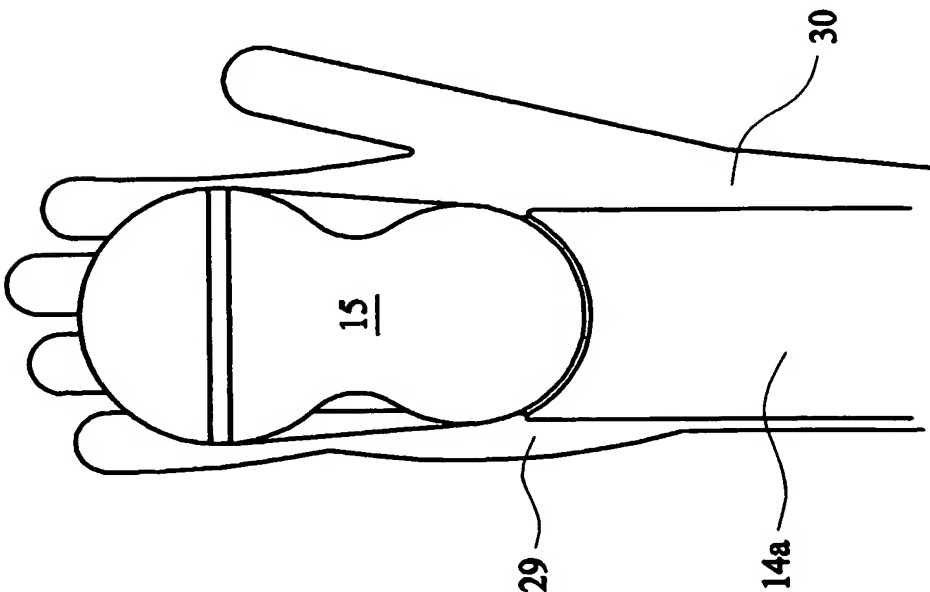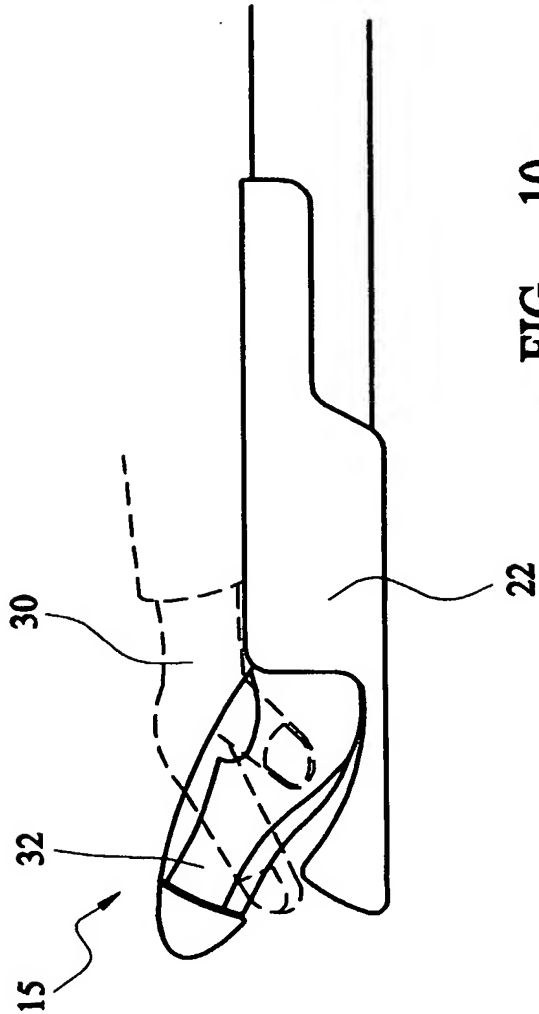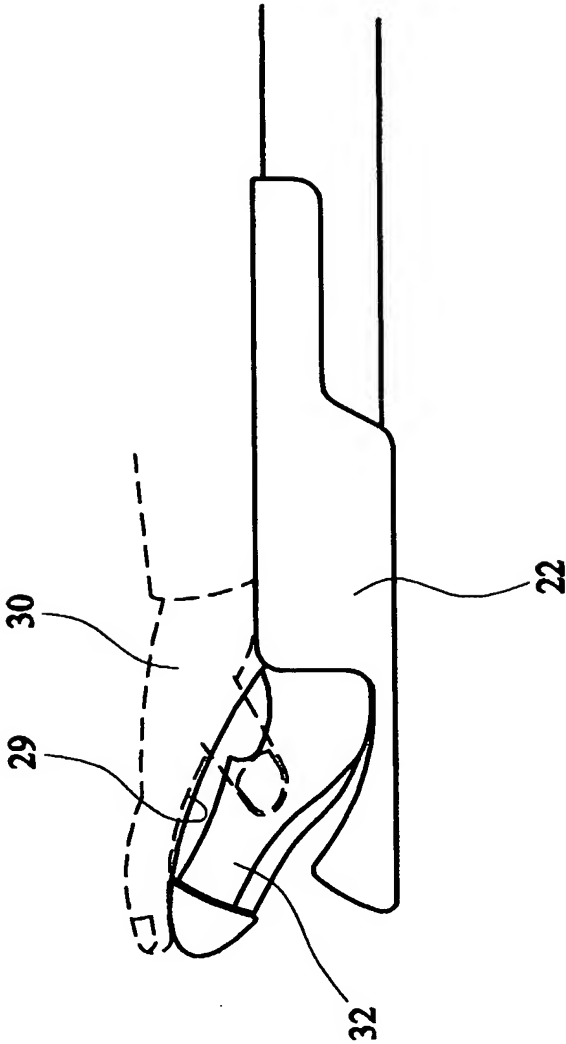

19 SEP 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number
WO 2004/083093 A3

(51) International Patent Classification⁷: **B66B 9/08**
(21) International Application Number:
PCT/GB2004/000877

(22) International Filing Date: 3 March 2004 (03.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0306367.4 20 March 2003 (20.03.2003) GB

(71) Applicant (for all designated States except US): **STAN-
NAH STAIRLIFTS LIMITED** [GB/GB]; Watt Close,
East Portway, Andover, Hampshire SP10 3SD (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WOODHAMS, Max,
Daniel** [GB/GB]; 19 Balmoral Road, Andover, Hampshire
SP10 3HY (GB).


(74) Agents: **STRACHAN, Victoria, Jane et al.**; Urquhart-
Dykes & Lord LLP, Alexandra House, Alexandra Road,
Swansea SA1 5ED (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: IMPROVEMENTS IN OR RELATING TO STAIRLIFTS

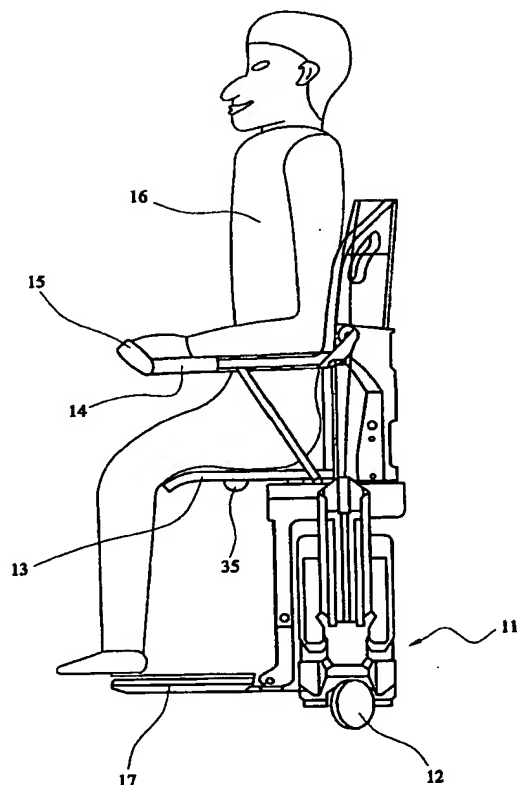

(57) Abstract: The invention provides a hand-operated inter-
face through which a stairlift user can control the operation of
the stairlift. The interface is configured for comfortable recep-
tion in the palm of the hand and its position may be adjusted
along the axis of the armrest of the stairlift chair to best suit the
arm length of the user. The interface may also incorporate an
isolation switch which provides both a visual and a tactile in-
dication of whether or not the stairlift controls are activated for
use.

WO 2004/083093 A3



GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
11 November 2004

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/000877

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B66B9/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B66B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 035 065 A (OOMS OTTO BV) 13 September 2000 (2000-09-13) column 4, lines 29-33	1-3,7,14
Y		4,5,8
A		6,9
X	WO 96/15974 A (LAMMERS EVERT JAN ; TRAPLIFT B V (NL)) 30 May 1996 (1996-05-30) page 5, lines 20,21	1,3,4,7, 14
Y		5,8
A		2,6,9
Y	US 6 366 274 B1 (ELLEDDGE DENNIS D) 2 April 2002 (2002-04-02) figures	4
Y	DE 19 43 012 U (FA. WILHELM MEYER) 28 July 1966 (1966-07-28) page 9, line 4 - page 10, line 13	5,8
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

18 June 2004

Date of mailing of the international search report

15. 09. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Eckenschwiller, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/000877

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 03/004399 A (FREELIFT B V ; HESTER MARTINUS JOSEPHUS (NL); VROEGINDEWEIJ DENNIS (NL) 16 January 2003 (2003-01-16) figure 1</p> <p>-----</p>	1-9,14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2004/000877

Box II Observations where certain claims were found unsearchable (Continuation of Item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of Item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-9, 14

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-9,14

A stairlift chair including a pair of armrests and a control interface, said control interface having a palm contacting surface forming an extension of the upper surface of the armrest or of which position is ajustable along the longitudinal axis of said armrest.

2. claims: 10,11,14

a manually engageable control interface for mounting on an armrest of a stairlift chair, including a palm contacting surface.

3. claims: 12-14,16

A manually engageable control interface for a stairlift including an insolation switch to isolate the power supply, wherein in a first configuration, the control interface is inactive.

4. claim: 15

A stairlift assembly including a hand operated control and a sensor provided to sense when a user is occupying the chair, said sensor being further operable to isolate and energize said hand operated control.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2004/000877

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1035065	A	13-09-2000	NL 1011547 C2	14-09-2000
			AT 267763 T	15-06-2004
			DE 60010952 D1	01-07-2004
			EP 1035065 A1	13-09-2000

WO 9615974	A	30-05-1996	NL 9401963 A	01-07-1996
			AT 177716 T	15-04-1999
			AU 3938495 A	17-06-1996
			DE 69508425 D1	22-04-1999
			DE 69508425 T2	01-07-1999
			DK 793614 T3	11-10-1999
			EP 0793614 A1	10-09-1997
			ES 2128782 T3	16-05-1999
			GR 3030250 T3	31-08-1999
			WO 9615974 A1	30-05-1996

US 6366274	B1	02-04-2002	NONE	

DE 1943012	U		NONE	

WO 03004399	A	16-01-2003	NL 1018443 C2	08-01-2003
			EP 1412276 A1	28-04-2004
			JP 2004521846 T	22-07-2004
			WO 03004399 A1	16-01-2003
